

# CERTIFIER MODEL 912

## CERTIFIER 912 Differential Testing



**One Tool, One Person, One Process. LITE CHECK.**


LITE-CHECK, LLC  
3102 E. Trent Avenue  
Spokane, WA 99202  
(800) 3438579 or (509) 535-7512

**Revision History:**


<b>Name</b>	<b>Date</b>	<b>Changes</b>	<b>Version #</b>
Gene Ambacher	October 5, 2013	Initial Draft	1.0.0
Gene Ambacher	October 13, 2013	Final Draft	2.0.0

## Differential Test Set-up

1. The Differential manifold (consisting of two glad-hands, orifice, and quick disconnect for sensor) connects to **front** of trailer **SERVICE** glad-hand.

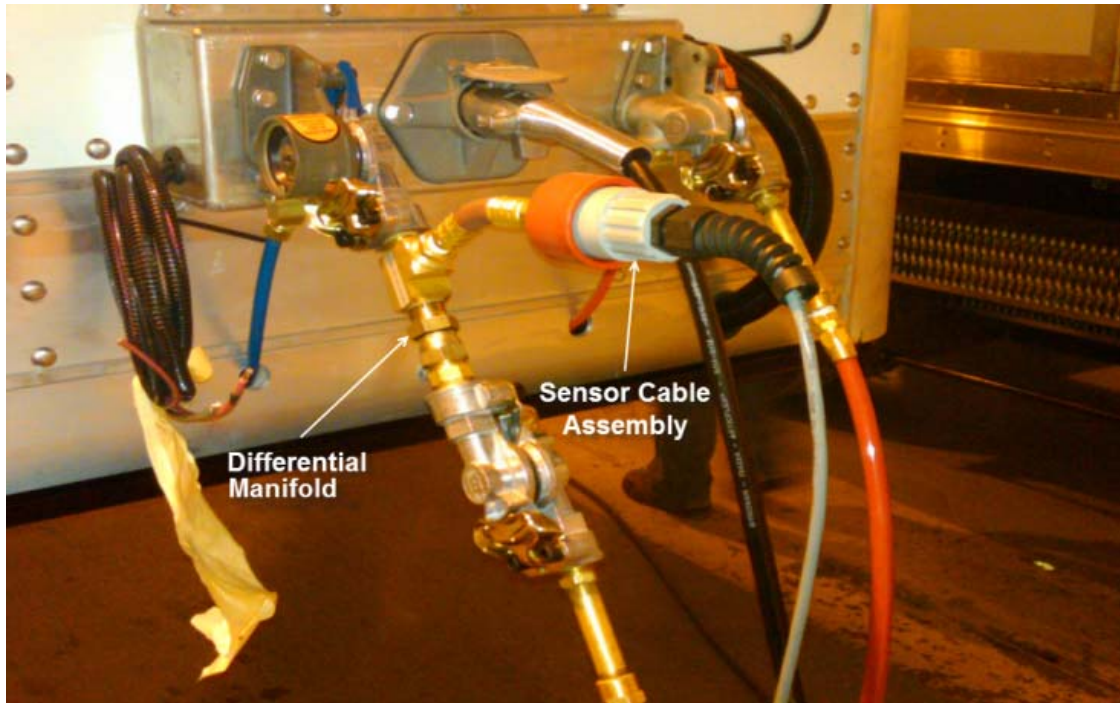

2. 50 cu. inch test chamber (Red w/ quick disconnect for sensor) connects to rear trailer **SERVICE** glad-hand

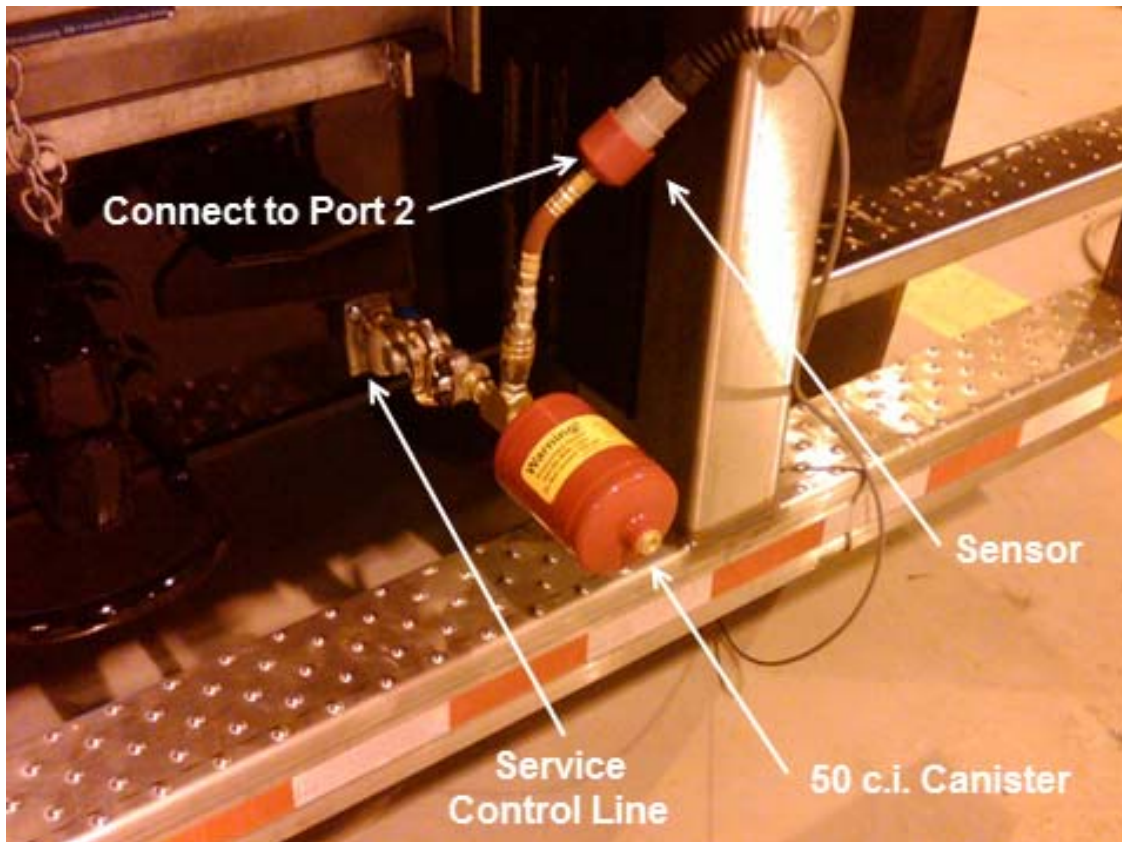

## Differential Self Test

1. Connect the Differential Manifold to the service line from the tester.
2. Connect the 50c.i. canister to the Differential Manifold.
3. Connect a sensor from port 1 on the HUB into the Differential Manifold.
4. Connect a sensor from port 2 on the HUB into the 50c.i. canister.
5. Block off the emergency line of the tester.

